



Hook and Loop

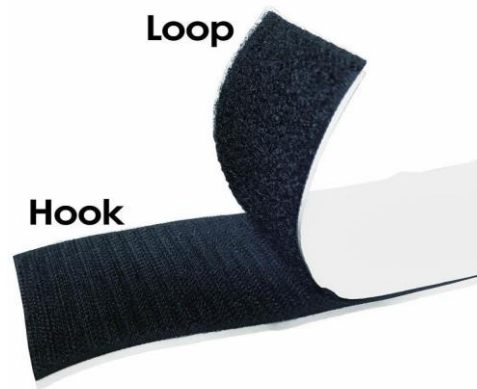

Weight of Hook		240gm ²
Loop		290gm ²
Heat Resistance	Melting point Hook	230°
	Melting point Loop	180°
Color fastness to washing	TS EN ISO 105-C06:2001	4
Color fastness to Dry Cleaning	TS 473 EN ISO 10-D01:1996	4
Color fastness to Perspration	TS 398 EN ISO 105-E04	4
Color fastness to Rubbing	TS EN ISO 105-X12:2006	4
Color fastness to Artifical Weathering	TS EN ISO 105-B04	5
Dimension Change after washing Drying and Dry Cleaning	TS EN 12243:2001	-3,0%

Hook and Loop

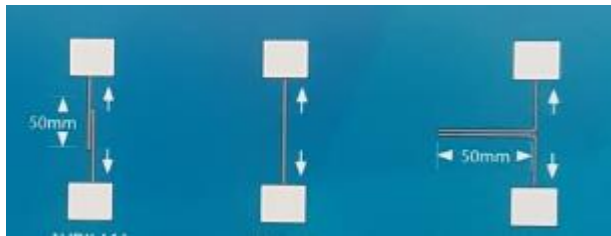

shear

breaking

peel



width	Shear Strength	0 opening-closing	10.000 opening-closing	Breaking Strength kg	Peel Strength	0 opening-closing	10.000 opening-closing			
16mm		8kg	6kg	48kg		240g	216g			
20mm		10kg	8kg	60kg		300g	270g			
25mm		12kg	10kg	75kg		375g	338g			
30mm		15kg	12kg	90kg		450g	405g			
40mm		20kg	16kg	120kg		600g	540g			
50mm		30kg	24kg	150kg		750g	675g			
100mm		50kg	40kg	300kg		1500g	1350g			
125mm		60kg	48kg	375kg		1875g	1688g			